



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

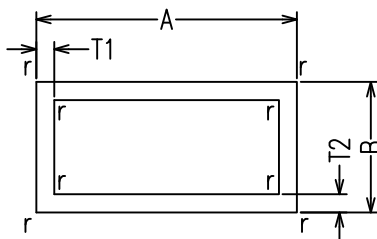

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2600	22.23	15.88	1.00	1.00	0.199	75.70	6063-T5
2601	25.40	12.70	0.80	0.80	0.158	76.20	6063-T5
2616	25.40	12.70	1.00	1.00	0.196	76.20	6063-T5
2619	25.40	12.70	1.00	1.50	0.227	75.68	6063-T5
2239	25.40	12.70	1.20	1.20	0.232	75.68	6063-T5
2819	25.40	12.70	1.30	1.30	0.250	75.68	6063-T5
2211	25.40	12.70	1.50	1.50	0.286	75.68	6063-T5
2871	25.40	12.70	2.30	2.30	0.418	75.68	6063-T5
2602	25.40	19.05	1.27	1.27	0.288	88.38	6063-T5
2874	31.75	19.05	2.30	2.30	0.576	101.08	6063-T5
3060	31.75	25.40	2.00	2.00	0.577	113.44	6061-T6
2612	31.80	19.05	0.90	0.90	0.248	101.70	6063-T5
2626	31.80	19.05	1.50	1.50	0.389	101.18	6063-T5
2624	31.80	19.05	2.00	2.00	0.508	101.70	6063-T5
2650	32.00	15.00	1.00	1.50	0.341	93.48	6063-T5
2893	38.00	25.00	1.50	1.50	0.488	125.48	6060-T5
2894	38.00	25.00	1.90	1.90	0.610	125.48	6060-T5
2644	38.00	25.00	3.00	3.00	0.928	125.48	6063-T5
2872	38.10	12.70	1.20	1.20	0.315	101.08	6063-T5
2886	38.10	19.05	1.40	1.40	0.413	113.78	6063-T5
2806	38.10	19.05	2.80	2.80	0.783	113.78	6063-T5
2219	38.10	19.05	3.05	3.05	0.845	113.78	6063-T5
3047	38.10	25.40	0.85	0.85	0.285	126.48	6063-T5
2603	38.10	25.40	1.00	1.00	0.334	126.48	6063-T5
2604	38.10	25.40	1.57	1.57	0.515	126.48	6063-T5



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

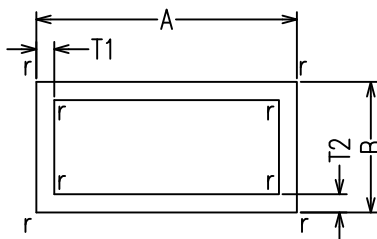

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2820	38.10	25.40	2.00	2.00	0.646	126.48	6063-T5
2220	38.10	25.40	2.41	2.41	0.767	126.48	6063-T5
2678	38.10	25.40	2.90	2.90	0.907	126.14	6061-T6
2840	38.10	25.40	3.18	3.18	0.984	126.48	6063-T5
2670	38.10	25.40	3.18	3.18	0.986	126.36	6061-T6
2699	40.00	20.00	2.00	2.00	0.607	119.48	6060-T66
2857	40.00	30.00	1.50	1.50	0.545	139.48	6063-T5
2856	40.00	38.00	1.50	1.50	0.610	155.48	6063-T5
2614	44.45	19.05	1.00	1.00	0.334	126.48	6063-T5
2666	50.00	20.00	2.00	2.00	0.713	139.48	6060-T6
2210	50.00	25.00	1.60	1.60	0.624	149.48	6060-T5
2209	50.00	25.00	3.00	3.00	1.123	149.48	6063-T6
2258	50.00	35.00	1.20	1.20	0.538	169.48	6063-T5
2658	50.80	12.70	1.20	1.20	0.398	126.48	6063-T5
2804	50.80	12.70	2.00	2.00	0.646	126.48	6063-T5
2684	50.80	19.05	0.95	1.00	0.363	139.18	6063-T5
2201	50.80	25.40	0.85	0.85	0.344	151.88	6063-T5
2605	50.80	25.40	1.00	1.00	0.402	151.88	6063-T5
2623	50.80	25.40	1.30	1.30	0.519	151.54	6063-T5
2606	50.80	25.40	1.57	1.57	0.627	151.88	6063-T5
2676	50.80	25.40	1.57	1.57	0.622	151.54	6061-T6 / 6082-T6
2682	50.80	25.40	1.60	1.60	0.634	151.54	6082-T6
2607	50.80	25.40	1.98	1.98	0.775	151.88	6063-T5
2861	50.80	25.40	2.41	2.41	0.934	151.88	6063-T52
2685	50.80	25.40	2.80	2.80	1.072	151.54	6061-T6



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

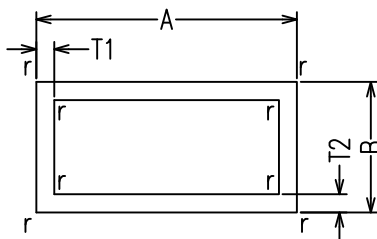

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2665	50.80	25.40	3.18	3.18	1.205	151.88	6063-T5
2672	50.80	25.40	3.18	3.18	1.205	151.54	6061-T6
2875	50.80	25.40	3.25	3.25	1.229	151.88	6063-T6
2696	50.80	25.40	4.50	4.50	1.640	151.54	6061-T6
2236	50.80	30.00	3.00	3.00	1.217	161.08	6061-T6
2615	50.80	38.10	1.25	1.25	0.586	177.80	6063-T5
2859	50.80	38.10	2.00	2.00	0.921	177.28	6063-T5
2831	50.80	38.10	2.80	2.80	1.265	177.28	6063-T5
2674	50.80	38.10	3.18	3.18	1.424	176.94	6061-T6
2899	55.00	35.00	2.00	2.00	0.933	179.48	6063-T5
2640	60.00	13.00	1.20	1.20	0.459	145.48	6063-T5
2803	60.00	40.00	3.00	3.00	1.530	199.48	6061-T6
2800	60.00	40.00	4.00	4.00	1.996	199.48	6060-T66
2611	63.50	25.40	1.00	1.00	0.471	177.28	6063-T5
2213	63.50	25.40	1.60	1.60	0.766	177.28	6063-T5
2887	63.50	25.40	2.80	2.80	1.265	177.28	6063-T5
2891	63.50	25.40	3.00	3.00	1.349	176.94	6061-T6
2816	63.50	31.75	2.00	2.00	0.990	189.98	6063-T5
2876	63.50	38.10	3.05	3.05	1.580	202.68	6063-T52
2242	63.50	38.10	3.18	3.18	1.641	202.34	6061-T6511
3051	63.50	38.10	3.18	3.18	1.643	202.68	6063-T52
2267	63.50	44.50	1.00	1.00	0.575	215.38	6063-T5
2287	75.00	18.00	1.00	1.00	0.494	185.48	6063-T5
2642	75.00	43.00	3.00	3.00	1.823	235.48	6063-T5
2641	75.00	50.00	1.50	1.50	0.993	249.48	6063-T5



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

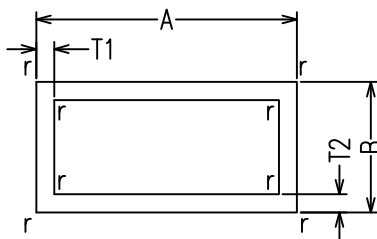

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2292	75.00	50.00	1.80	1.80	1.186	249.48	6063-T5
2618	76.00	45.00	3.00	2.00	1.492	241.31	6063-T5
2645	76.00	63.50	1.50	1.50	1.111	278.48	6063-T5
2870	76.20	12.70	1.20	1.20	0.563	177.28	6063-T5
2261	76.20	15.88	2.50	2.50	1.181	183.64	6063-T5
2200	76.20	25.40	0.85	0.85	0.461	202.68	6063-T5
2648	76.20	25.40	0.95	0.95	0.514	202.68	6063-T5
2617	76.20	25.40	1.10	1.10	0.593	203.20	6063-T5
2638	76.20	25.40	1.30	1.30	0.698	202.68	6063-T5
2692	76.20	25.40	1.50	1.50	0.802	202.68	6063-T5
2827	76.20	25.40	2.00	2.00	1.059	202.68	6063-T5
2620	76.20	25.40	2.36	2.36	1.240	203.20	6063-T5
2278	76.20	25.40	2.40	2.40	1.260	202.68	6060-T5
2810	76.20	25.40	2.80	2.80	1.458	202.68	6063-T5
2862	76.20	25.40	3.05	3.05	1.579	202.68	6063-T52
2673	76.20	25.40	3.18	3.18	1.643	202.34	6061-T6
2691	76.20	38.10	1.00	1.00	0.609	228.08	6063-T5
2805	76.20	38.10	1.10	1.10	0.669	228.08	6063-T5
2826	76.20	38.10	2.00	2.00	1.197	228.08	6063-T5
2679	76.20	38.10	2.80	2.80	1.651	227.74	6061-T6
2298	76.20	38.10	3.05	3.05	1.790	227.74	6061-T6
2889	76.20	38.10	3.18	3.18	1.859	227.74	6082-T6511
2698	76.20	38.10	3.18	3.18	1.862	228.56	6063-T5
2272	76.20	38.10	4.50	4.50	2.571	227.74	6061-T6
2286	76.20	38.10	4.78	4.78	2.716	227.74	6061-T6511



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

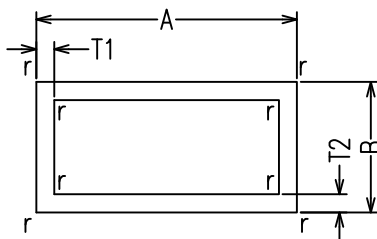

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2659	76.20	38.20	1.30	1.30	0.788	228.28	6063-T5
2808	76.20	44.45	1.10	1.10	0.707	240.78	6063-T5
2610	76.20	44.45	1.60	1.60	1.020	240.78	6063-T5
2276	76.20	44.45	2.00	2.00	1.266	240.78	6063-T5
2879	76.20	44.45	2.80	2.80	1.748	240.78	6063-T5
2807	76.20	50.80	1.20	1.20	0.811	253.48	6063-T5
2284	76.20	50.80	1.30	1.30	0.877	253.48	6063-T5
2823	76.20	50.80	2.00	2.00	1.335	253.48	6063-T5
2813	76.20	50.80	2.80	2.80	1.844	253.48	6063-T5
2649	76.20	50.80	3.00	3.00	1.969	253.48	6061-T5
2656	76.20	50.80	3.18	3.18	2.081	253.48	6063-T5
2671	76.20	50.80	3.18	3.18	2.081	253.14	6061-T6
2866	76.20	50.80	3.18	3.18	2.078	253.14	6061-T6
2697	76.20	50.80	4.50	4.50	2.880	253.14	6061-T6
3022	76.20	50.80	4.78	4.78	3.046	253.14	6061-T6511
2694	76.20	50.80	6.00	6.00	3.743	253.14	6061-T6
2217	76.20	50.80	6.35	6.35	3.938	253.14	6061-T6
2689	80.00	40.00	2.00	2.00	1.258	239.14	6082-T6
2801	80.00	40.00	3.00	3.00	1.855	239.48	6060-T66
2204	80.00	50.00	3.00	3.00	2.018	259.48	6060-T6
2235	92.00	13.00	1.20	1.20	0.668	209.48	6063-T5
2279	100.00	25.00	2.50	2.50	1.628	249.48	6060-T5
2268	100.00	30.00	1.60	1.60	1.101	259.48	6063-T5
2660	100.00	38.00	2.30	2.30	1.664	275.48	6063-T5
2890	100.00	38.00	3.00	3.00	2.148	275.48	6063-T5



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

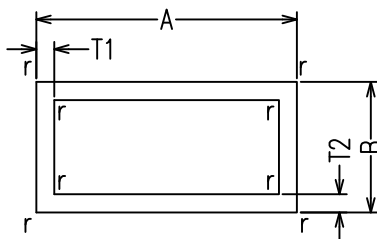

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2215	100.00	50.00	1.30	1.30	1.040	299.48	6063-T5
2203	100.00	50.00	3.00	3.00	2.344	299.48	6060-T6
2802	100.00	50.00	4.00	4.00	3.081	299.48	6060-T66
2643	100.00	50.00	5.00	5.00	3.797	299.48	6063-T5
2255	100.00	75.00	2.00	2.00	1.855	349.48	6063-T5
2622	101.00	50.00	1.80	1.80	1.439	301.48	6063-T5
2237	101.60	12.70	1.20	1.20	0.729	228.08	6063-T5
3201	101.60	25.40	1.00	1.00	0.678	253.48	6063-T5
2226	101.60	25.40	1.10	1.10	0.746	253.48	6063-T5
2625	101.60	25.40	1.20	1.20	0.811	253.48	6063-T5
2652	101.60	25.40	1.50	1.50	1.050	253.48	6063-T5
2811	101.60	25.40	2.00	2.00	1.335	253.48	6063-T5
2621	101.60	25.40	2.36	2.36	1.566	254.00	6063-T5
2815	101.60	25.40	2.80	2.80	1.844	253.48	6063-T5
2653	101.60	25.40	3.00	3.00	1.969	253.48	6063-T5
3023	101.60	25.40	3.05	3.05	2.000	253.14	6061-T6511
2833	101.60	25.40	3.18	3.18	2.078	253.48	6063-T5
2223	101.60	38.10	1.50	1.50	1.112	278.88	6063-T5
2224	101.60	44.45	1.10	1.10	0.859	291.58	6063-T5
2277	101.60	44.45	2.00	2.00	1.541	291.58	6063-T5
2881	101.60	44.45	2.80	2.80	2.133	291.58	6063-T5
2888	101.60	44.45	3.18	3.18	2.410	291.58	6063-T5
2289	101.60	50.80	1.10	1.10	0.896	304.28	6063-T5
2822	101.60	50.80	1.50	1.50	1.216	304.28	6063-T5
2809	101.60	50.80	2.00	2.00	1.610	304.28	6063-T5



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

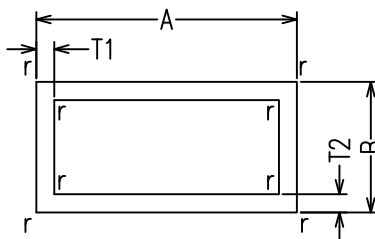

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2828	101.60	50.80	2.80	2.80	2.230	304.28	6063-T5
2639	101.60	50.80	3.00	3.00	2.383	304.28	6063-T5
2243	101.60	50.80	3.05	3.05	2.419	303.94	6061-T6511
2686	101.60	50.80	3.18	3.18	2.519	303.94	6082-T6
2841	101.60	50.80	3.18	3.18	2.516	304.28	6063-T5
2829	101.60	50.80	4.50	4.50	3.501	303.94	6082-T6
2839	101.60	50.80	4.78	4.78	3.700	304.28	6063-T5
2877	101.60	50.80	4.78	4.78	3.704	303.94	6061-T6511
2695	101.60	50.80	5.90	5.90	4.500	303.94	6061-T6
2675	101.60	50.80	6.35	6.35	4.813	303.94	6082-T6
2654	101.60	76.00	3.00	3.00	2.793	354.68	6063-T5
2681	101.60	76.20	3.18	3.18	2.958	354.74	6082-T6
2265	101.60	76.20	4.50	4.50	4.121	355.08	6063-T5
2669	101.60	76.20	6.35	6.35	5.687	354.74	6061-T6
2266	120.00	60.00	1.50	1.50	1.440	359.48	6063-T5
2257	120.00	60.00	6.30	6.30	5.722	359.14	6061-T6
2269	125.00	25.00	1.30	1.30	1.040	299.48	6063-T5
2270	125.00	38.00	1.50	1.50	1.302	325.48	6063-T5
2885	125.00	38.00	1.90	1.90	1.641	325.48	6063-T5
2664	125.00	38.00	2.30	2.30	1.976	325.48	6063-T5
2283	125.00	50.00	1.50	1.50	1.400	349.48	6063-T5
2897	127.00	25.40	2.00	2.00	1.610	304.28	6063-T5
2884	127.00	50.80	2.00	2.00	1.886	354.74	6063-T5
2683	127.00	50.80	3.00	3.00	2.796	354.74	6082-T6
2662	127.00	50.80	3.00	3.00	2.796	355.08	6063-T5



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

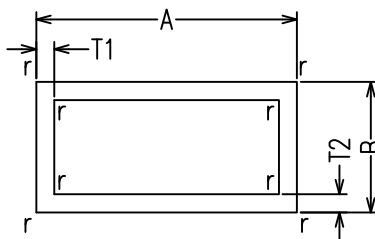

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2253	127.00	50.80	3.18	3.18	2.953	355.08	6063-T52
2241	127.00	50.80	3.18	3.18	2.953	354.74	6061-T6511
3024	127.00	50.80	6.35	6.35	5.688	354.74	6061-T6511
2212	127.00	76.20	1.50	1.50	1.629	405.88	6063-T5
2878	127.00	76.20	2.80	2.80	3.002	405.88	6063-T5
2248	127.00	76.20	6.35	6.35	6.563	405.54	6061-T6511
2233	130.00	40.00	3.00	3.00	2.669	339.48	6063-T5
2690	130.00	50.00	4.00	4.00	3.733	359.14	6060-T66
2262	135.00	60.00	3.13	3.13	3.205	389.48	6063-T5
2817	140.00	25.40	1.80	1.80	1.580	330.28	6063-T5
2647	150.00	20.00	1.70	1.70	1.536	339.48	6063-T5
3204	150.00	40.00	1.85	1.85	1.870	379.48	6063-T5
2646	150.00	45.00	2.00	2.00	2.072	389.48	6063-T5
2214	150.00	50.00	1.50	1.50	1.603	399.48	6063-T5
2651	150.00	50.00	1.90	1.90	2.022	399.48	6063-T5
2663	150.00	50.00	3.00	3.00	3.157	399.48	6063-T5
2830	150.00	50.00	5.00	5.00	5.154	399.14	6082-T6
2688	150.00	75.00	2.00	2.00	2.398	449.48	6063-T5
2883	150.00	75.00	10.00	10.00	11.122	448.28	6061-T6
3200	150.00	100.00	2.80	2.80	3.712	499.48	6063-T5
2222	150.00	100.00	4.00	4.00	5.252	499.48	6063-T5
2661	150.00	100.00	5.00	5.00	6.510	499.14	6063-T5
2218	150.00	120.00	2.80	2.80	4.016	539.48	6063-T5
2202	152.40	25.40	1.50	1.50	1.423	355.08	6063-T5
2818	152.40	50.80	2.80	2.80	3.000	405.54	6063-T5



RECTANGULAR HOLLOW


Group No.:

RTH-G1

Legend:

6060 / 6063 = r0.3

6061 / 6082 = r0.5

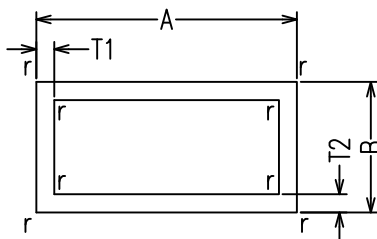


SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2693	152.40	50.80	3.00	3.00	3.209	405.54	6061-T6
2832	152.40	50.80	3.18	3.18	3.391	405.54	6061-T6511
2842	152.40	50.80	4.78	4.78	5.017	405.88	6063-T5
2238	152.40	50.80	6.35	6.35	6.563	405.54	6061-T6511
2880	152.40	76.20	2.80	2.80	3.387	456.68	6063-T5
2657	152.40	76.20	3.00	3.00	3.622	456.68	6063-T5
2249	152.40	76.20	4.78	4.78	5.675	456.34	6061-T6511
2259	152.40	76.20	6.00	6.00	7.050	456.34	6061-T6
2290	152.40	101.60	2.00	2.00	2.713	507.48	6063-T5
2867	152.40	101.60	2.80	2.80	3.773	507.48	6063-T5
2246	152.40	101.60	6.35	6.35	8.313	507.14	6061-T6511
2256	160.00	100.00	5.00	5.00	6.782	519.48	6063-T5
2882	175.00	50.00	2.20	2.20	2.633	449.48	6063-T5
2252	200.00	30.00	5.00	4.75	5.710	459.48	6063-T5
2208	200.00	50.00	3.00	3.00	3.974	499.48	6060-T6
2655	200.00	75.00	3.00	3.00	4.378	549.48	6063-T5
20955	200.00	100.00	3.00	3.00	4.783	598.10	6063-T5
2898	200.00	100.00	5.00	5.00	7.867	599.48	6063-T5
2293	203.20	50.80	2.30	2.30	3.112	507.48	6063-T6
2814	203.20	50.80	3.00	3.00	4.036	507.48	6063-T5
2285	203.20	50.80	3.18	3.18	4.272	507.14	6061-T6511
2251	203.20	101.60	6.35	6.35	10.062	608.74	6061-T6
2260	250.00	50.00	3.00	3.00	4.785	599.48	6063-T5
2247	300.00	50.00	3.50	3.50	6.513	699.48	6063-T5
2234	300.00	100.00	3.50	3.50	7.462	799.48	6063-T5



RECTANGULAR HOLLOW

Group No.:

RTH-G2

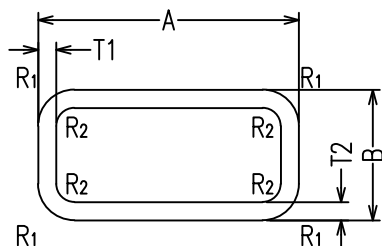


SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	R1 (mm)	R2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
3003	38.00	25.00	1.50	1.50	3.00	1.50	0.473	120.85	6063-T6
2825	38.00	25.00	1.50	1.50	3.00	1.50	0.473	120.85	6063-T6
2895	38.00	25.00	2.20	2.20	3.00	1.50	0.683	120.85	6060-T5
2771	38.10	25.40	1.00	1.00	3.00	2.00	0.322	121.85	6063-T5
2263	38.10	25.40	2.29	2.29	3.18	0.89	0.710	121.51	6061-T6
2296	38.10	25.40	2.41	2.41	2.39	1.00	0.756	122.90	6061-T6
2680	38.10	25.40	3.17	3.17	2.00	1.00	0.976	123.57	6082-T6
2892	50.00	10.00	1.10	1.10	1.50	0.30	0.340	117.42	6060-T5
2677	50.00	40.00	2.00	2.00	2.00	0.50	0.924	176.57	6082-T6
2280	50.00	25.00	3.00	3.00	3.00	0.30	1.102	144.85	6060-T5
2295	50.80	25.40	2.41	2.41	2.39	1.00	0.922	148.30	6061-T6
2858	50.80	25.40	3.18	3.18	6.35	3.18	1.133	141.50	6061-T6511
2232	63.50	38.10	3.18	3.18	7.11	3.94	1.559	190.99	6061-T6511
2824	65.00	16.00	1.20	1.20	3.00	1.80	0.498	156.85	6063-T6
2281	65.00	16.00	1.20	1.20	3.00	1.60	0.497	156.85	6060-T5
2264	65.00	16.00	1.40	1.40	3.00	1.60	0.579	156.85	6060-T5
2207	65.00	16.00	1.40	1.40	2.00	2.00	0.594	158.57	6060-T6
2275	76.20	25.40	3.05	3.05	3.05	0.50	1.559	197.96	6061-T6511
2297	76.20	25.40	3.18	3.18	3.18	1.00	1.620	197.75	6061-T6
2288	76.20	38.10	2.29	2.29	3.00	0.71	1.343	223.45	6061-T6511
3030	76.20	38.10	3.05	3.05	9.53	6.48	1.674	212.25	6061-T6511
2245	76.20	38.10	3.18	3.18	3.18	3.18	1.859	223.15	6061-T6511
2240	76.20	38.10	4.78	4.78	4.78	4.78	2.714	220.40	6061-T6511
2834	76.20	50.80	3.18	3.18	3.18	0.79	2.056	248.55	6061-T6511
3039	76.20	50.80	3.18	3.18	4.78	1.60	2.031	245.80	6061-T6511



RECTANGULAR HOLLOW

Group No.:

RTH-G2

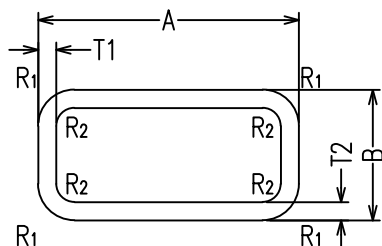

SECTION NO.	A (mm)	B (mm)	T1 (mm)	T2 (mm)	R1 (mm)	R2 (mm)	WEIGHT (kg/m)	AP (mm)	ALLOY TYPE & TEMPER
2229	76.20	50.80	4.75	4.75	1.58	0.38	3.023	251.30	6061-T6511
2271	76.20	50.80	4.76	4.76	6.35	3.18	2.965	243.10	6061-T6511
2837	76.20	50.80	6.35	6.35	4.78	4.06	3.923	245.80	6061-T6511
2230	76.20	50.80	6.35	6.35	6.35	3.18	3.867	243.10	6061-T6511
2206	80.00	50.00	3.00	3.00	6.00	6.00	2.018	249.70	6060-T6
2274	100.00	50.00	3.00	3.00	4.00	0.50	2.307	293.13	6061-T6
2282	100.00	50.00	3.00	3.00	6.00	3.00	1.904	289.70	6060-T5
2205	100.00	50.00	3.00	3.00	6.00	6.00	2.344	289.70	6060-T6
2687	101.60	38.10	2.95	2.95	2.54	0.30	2.127	275.04	6063-T5
2244	101.60	50.80	3.05	3.05	6.35	3.30	2.351	293.90	6061-T6511
2221	101.60	50.80	3.18	3.18	7.11	7.11	2.516	292.59	6061-T6511
2225	101.60	50.80	4.78	4.78	6.35	6.35	3.704	293.90	6061-T6511
2835	101.60	50.80	6.35	6.35	6.35	3.18	4.742	293.90	6063-T6511
2836	101.60	76.20	4.75	4.75	6.35	1.70	4.250	344.70	6061-T6511
2228	101.60	76.20	6.35	6.35	9.52	3.18	5.500	339.25	6061-T6511
2250	127.00	50.80	6.35	6.35	1.57	1.57	5.688	352.90	6061-T6511
2273	152.00	76.00	6.00	6.00	6.00	2.00	6.957	445.70	6063-T5
2231	152.40	50.80	3.05	3.05	6.35	3.30	3.193	395.50	6061-T6511
2869	152.40	50.80	3.175	3.175	9.525	6.48	3.277	390.05	6061-T6511
2896	152.40	50.80	3.18	3.18	9.53	6.48	3.282	390.04	6061-T6511
2294	152.40	50.80	6.35	6.35	6.35	1.50	6.474	395.50	6061-T6
2860	152.40	101.60	6.35	6.35	6.35	6.35	8.313	497.10	6061-T6