



ALBENestra®



Performance Casement Window **PCW01**

Designed and tested according to MS832:2022



**LB
ALUMINIUM
BERHAD**
198501006093 (138535-V)

Product

ALBENestra PCW01

Typical Technical Features

Nominal Wall Thickness	: 1.30mm - 1.35mm
Standard Frame Depth	: 40.00mm
Mullion Depth	: 40.00mm, 80.00mm & 100.00mm
Glazing Gap	: 10.00mm - 34.00mm
Locking System	: Single-point & Multipoint
Surface Finish	: Overlap
Hinges	: Butt. Hinges (Exposed Only)
Corner Joints	: Mitre Joints With Brackets



Performance Test


This casement window suite had been tested in compliance to MS 832:2022 performance test procedure for:

1. 1800Pa windload : Passed
2. 360Pa air leakage : Passed
3. 540Pa water infiltration : Passed


Note: Test report available upon request.



Typical Assembly Details

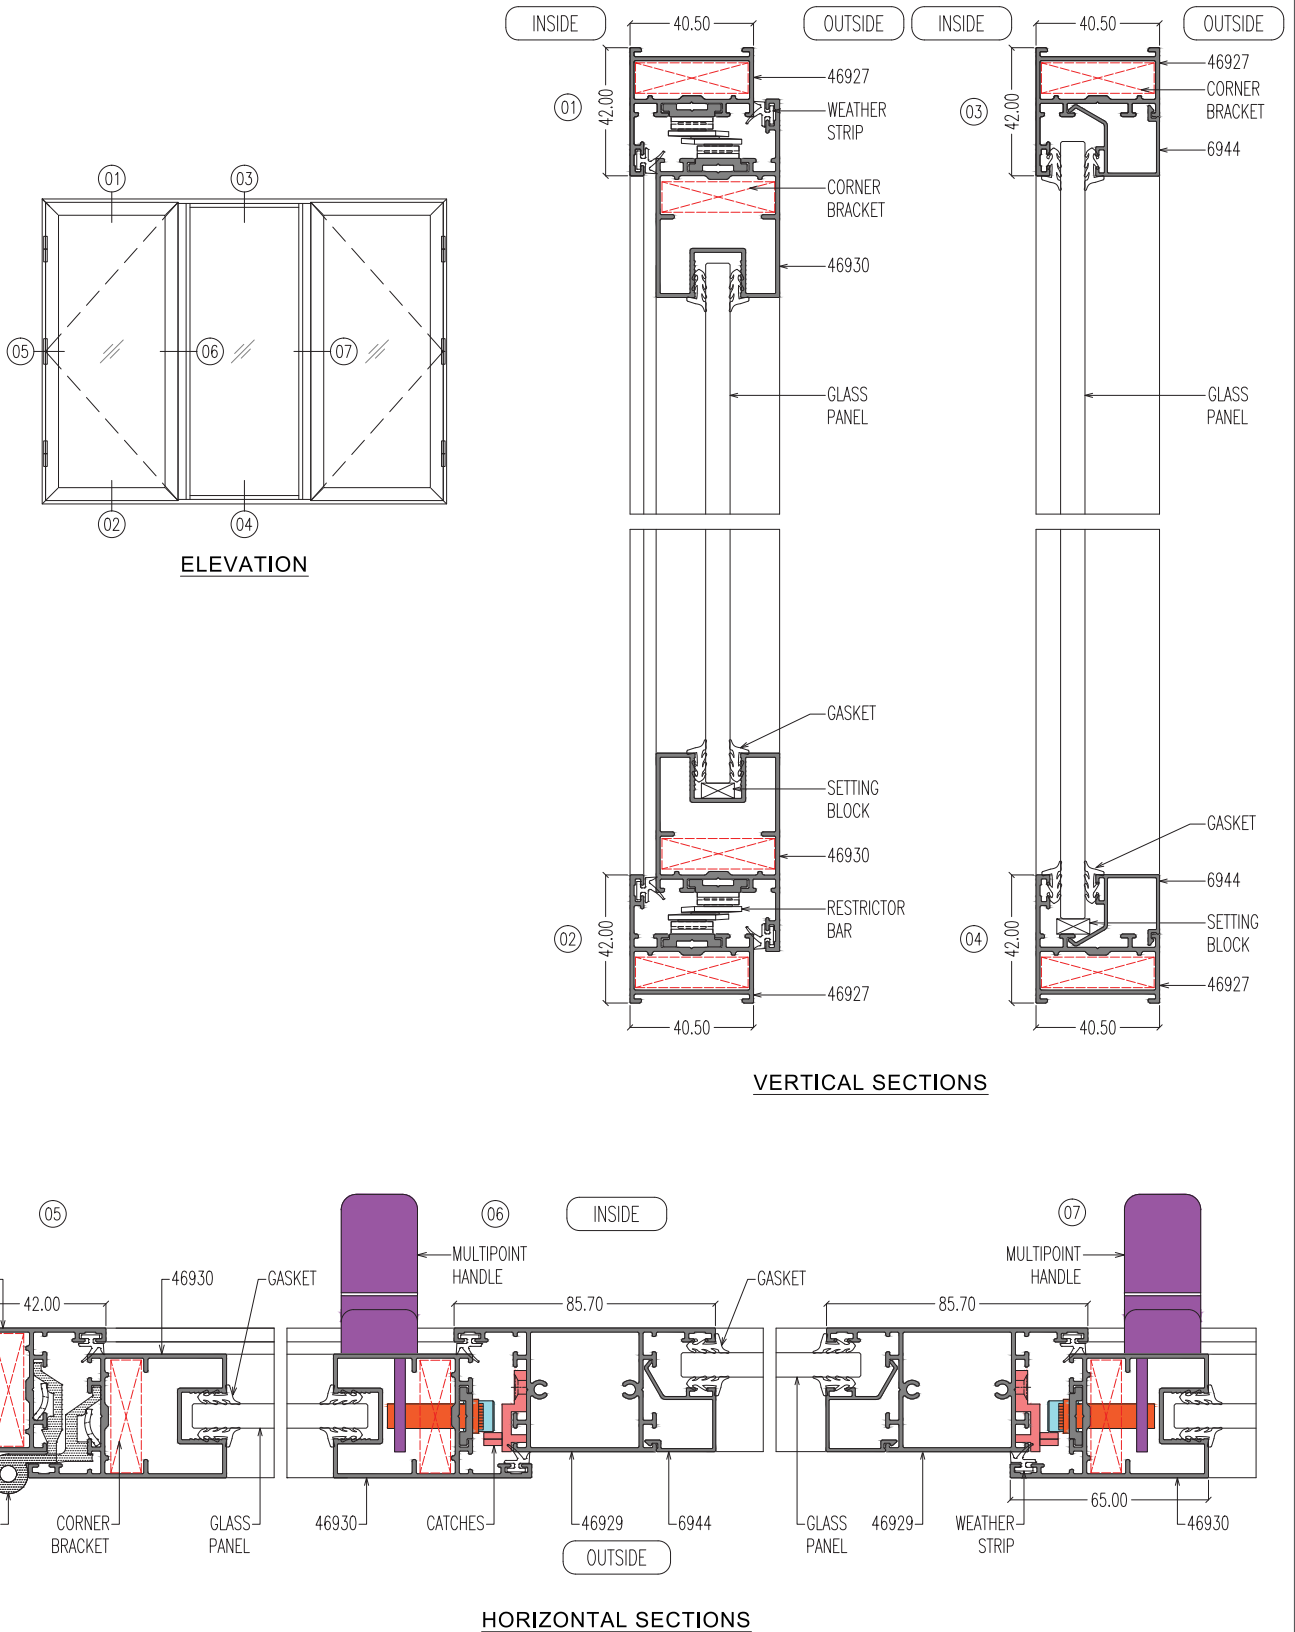


Typical Assembly Details

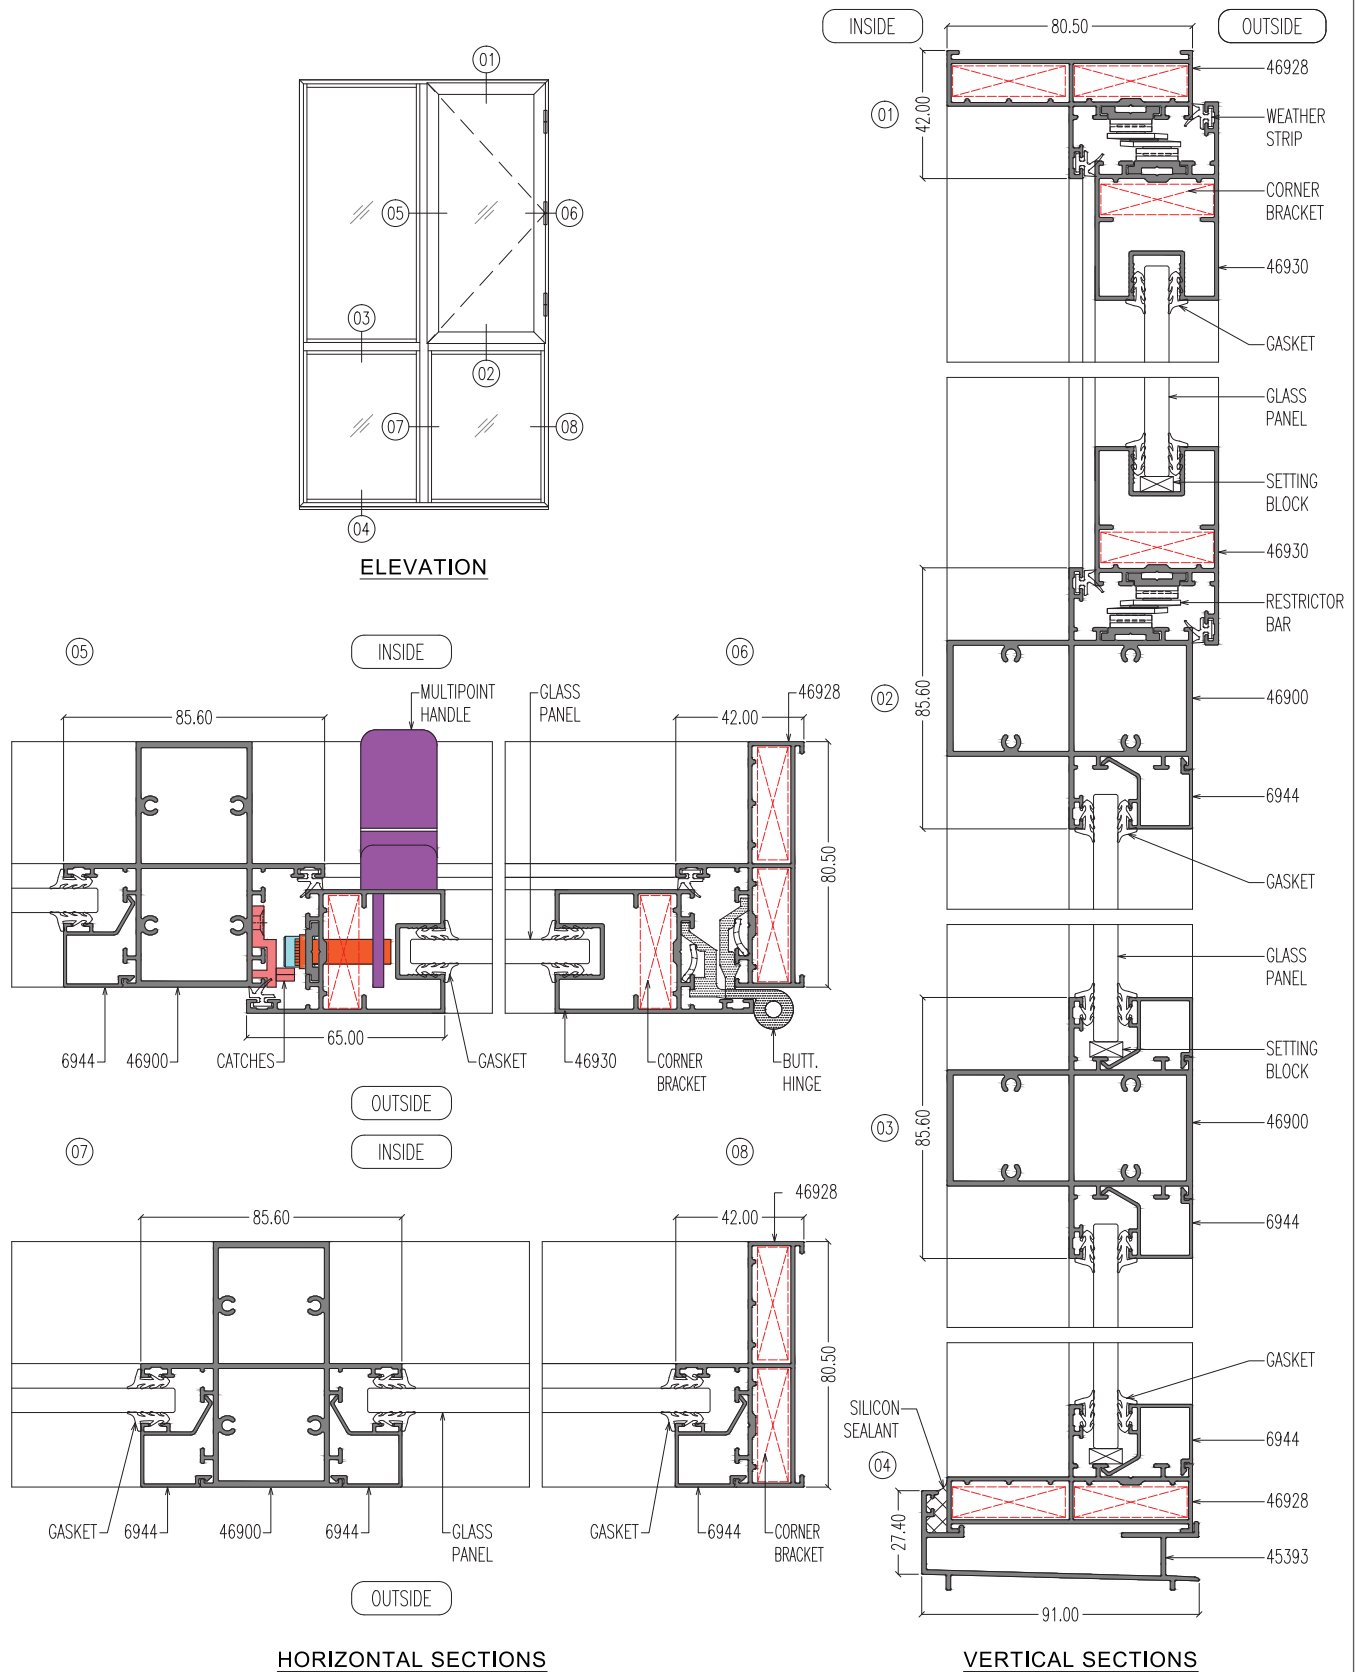


Typical Assembly Details

(Internal Beading)

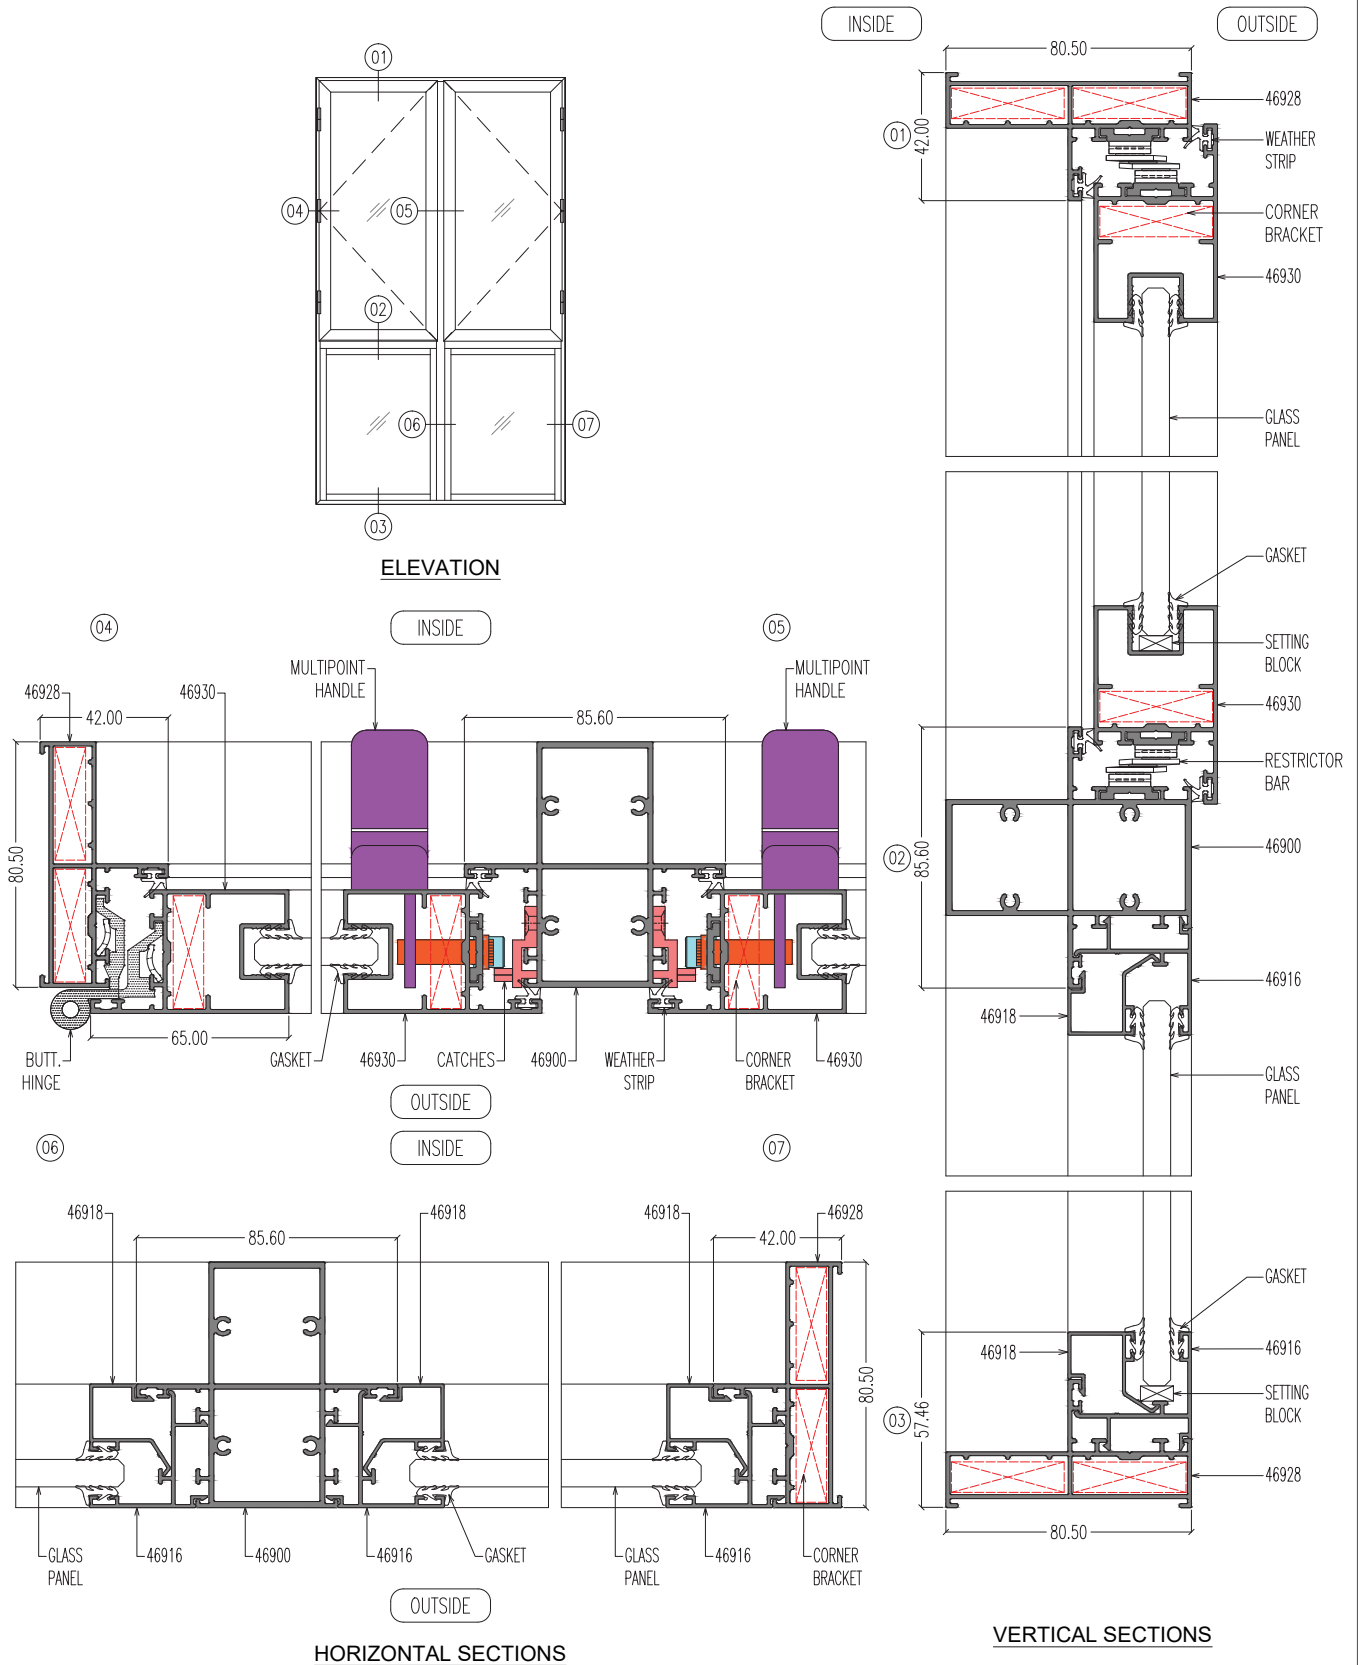


Typical Assembly Details

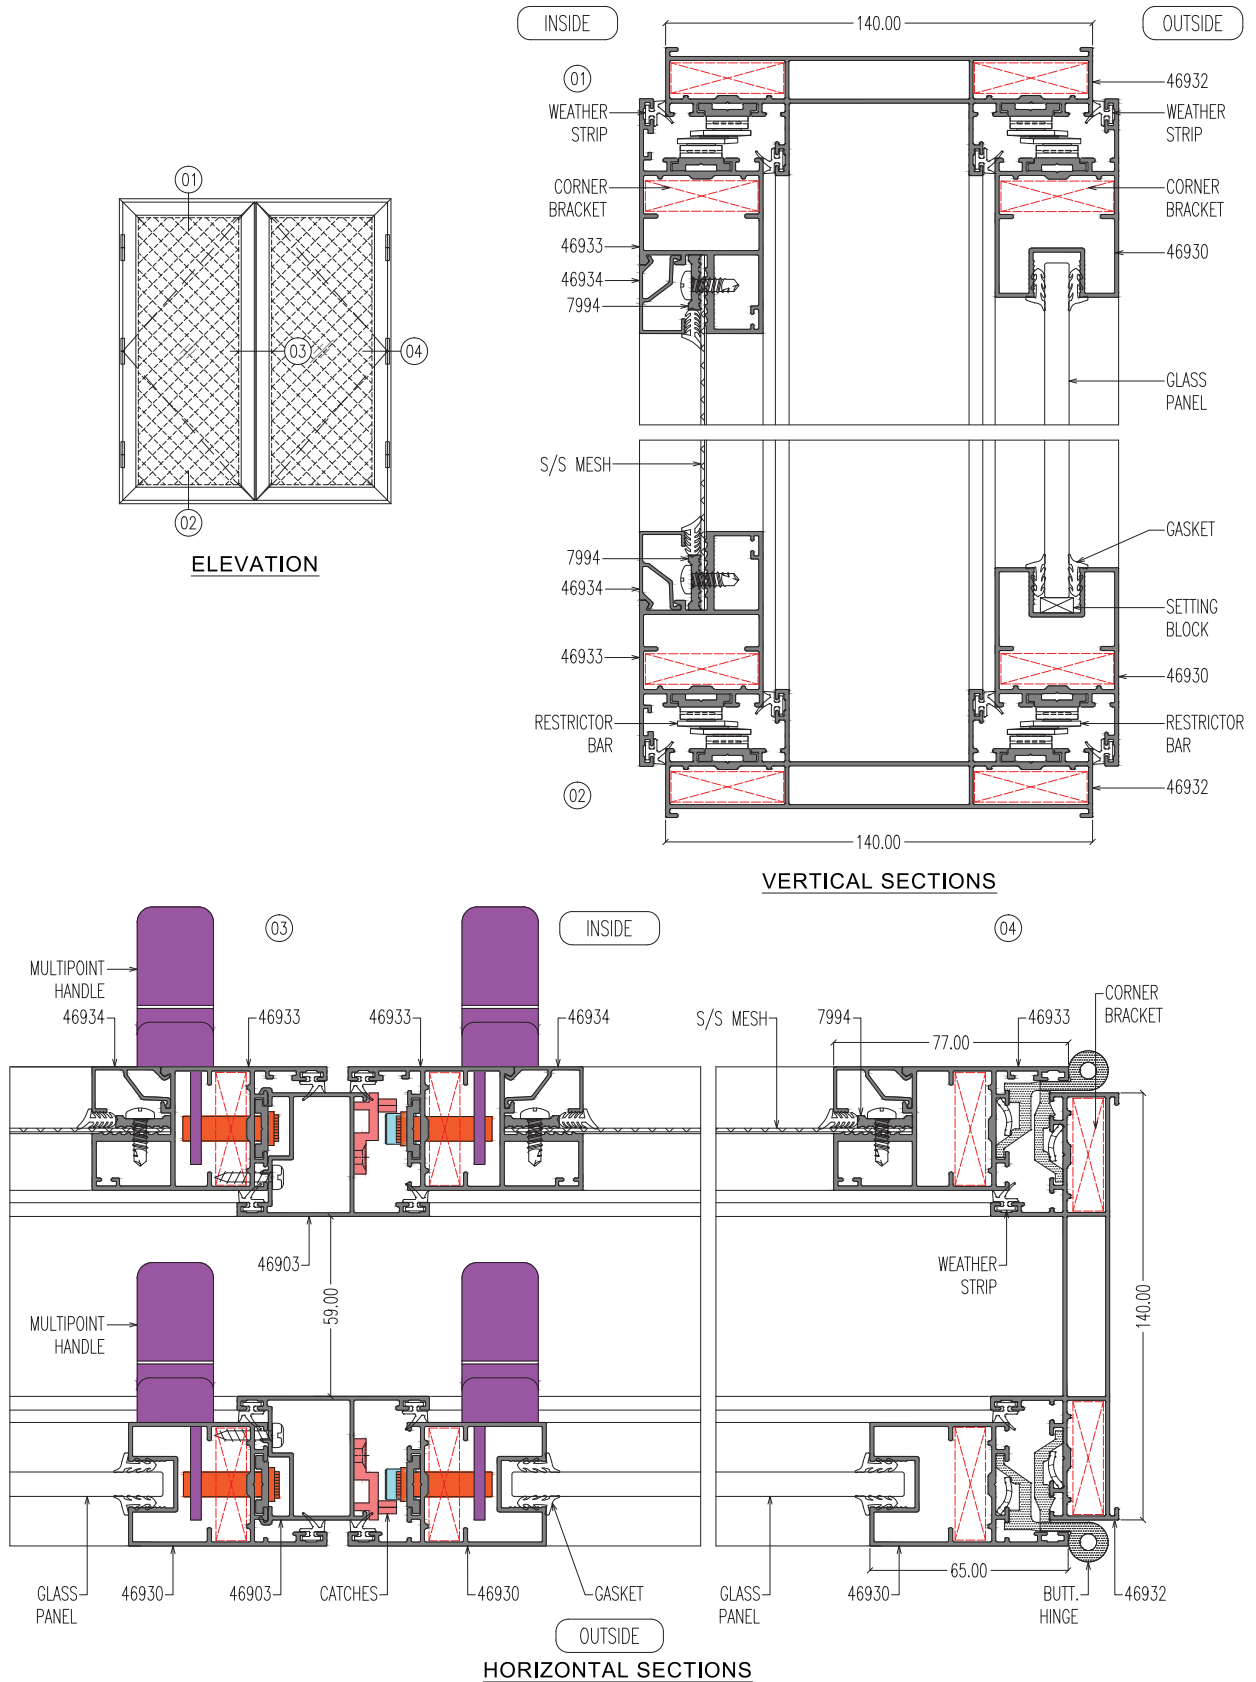

Wind Load Chart



MULLION SECTION : 46929
Alum. alloy : 6063-T5
Moment of inertia I_{xx} : 8.7 cm⁴
Mod. of section Z_{xx} : 3.6 cm³

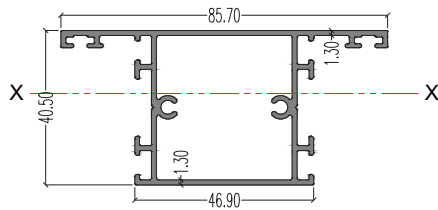

Note:
 Suffix xx denotes axis perpendicular to wind load

Mod. of elasticity : 70 x 10⁹ N/m²
Design bend. stress : 1.25 x 67 MPa
Deflection limit : $S_{pan}/175$, up to max. 20mm
Nature of anchor : Simply supported at both ends


Typical configuration of window:

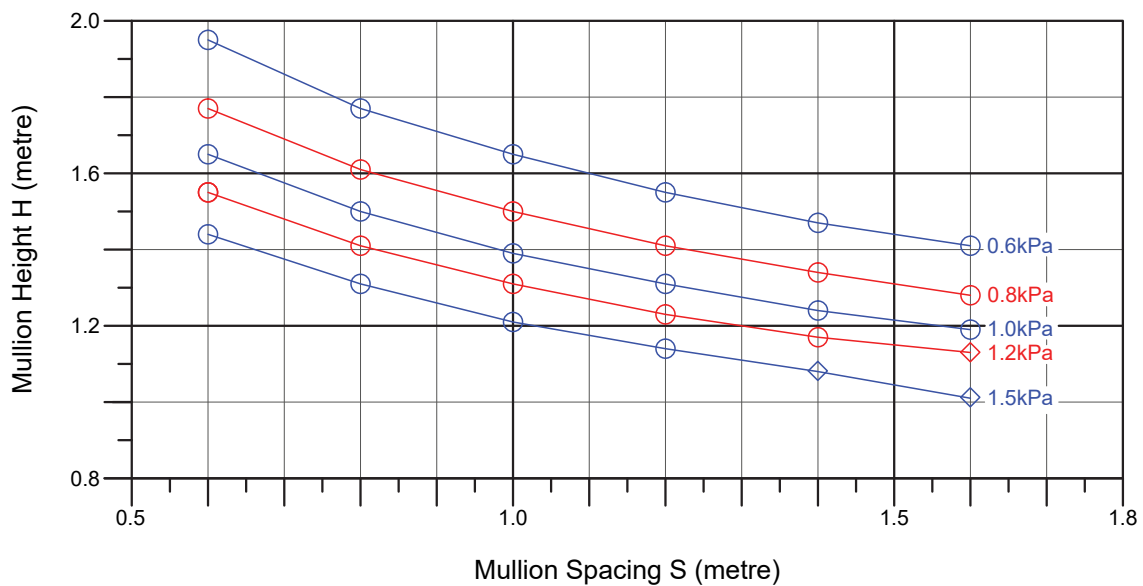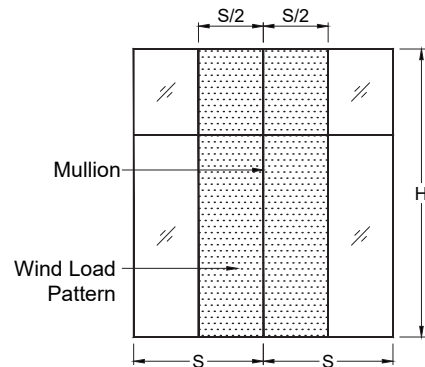

Note:
 ○ Deflection limit governs , ◇ Design bending stress governs
 :- Buckling has not been taken into account in this chart
 :- This windload chart is solely for reference only

Wind Load Chart



MULLION SECTION : 6977
 Alum. alloy : 6063-T5
 Moment of inertia I_{xx} : 31.9 cm^4
 Mod. of section Z_{xx} : 7.4 cm^3

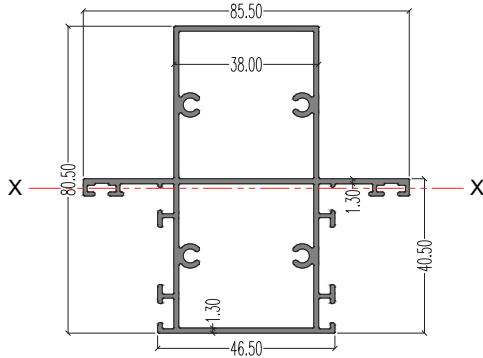

Note:
 Suffix xx denotes axis perpendicular to wind load

Mod. of elasticity : $70 \times 10^9 \text{ N/m}^2$
 Design bend. stress : $1.25 \times 67 \text{ MPa}$
 Deflection limit : $S_{\text{pan}}/175$, up to max. 20mm
 Nature of anchor : Simply supported at both ends


Typical configuration of window:

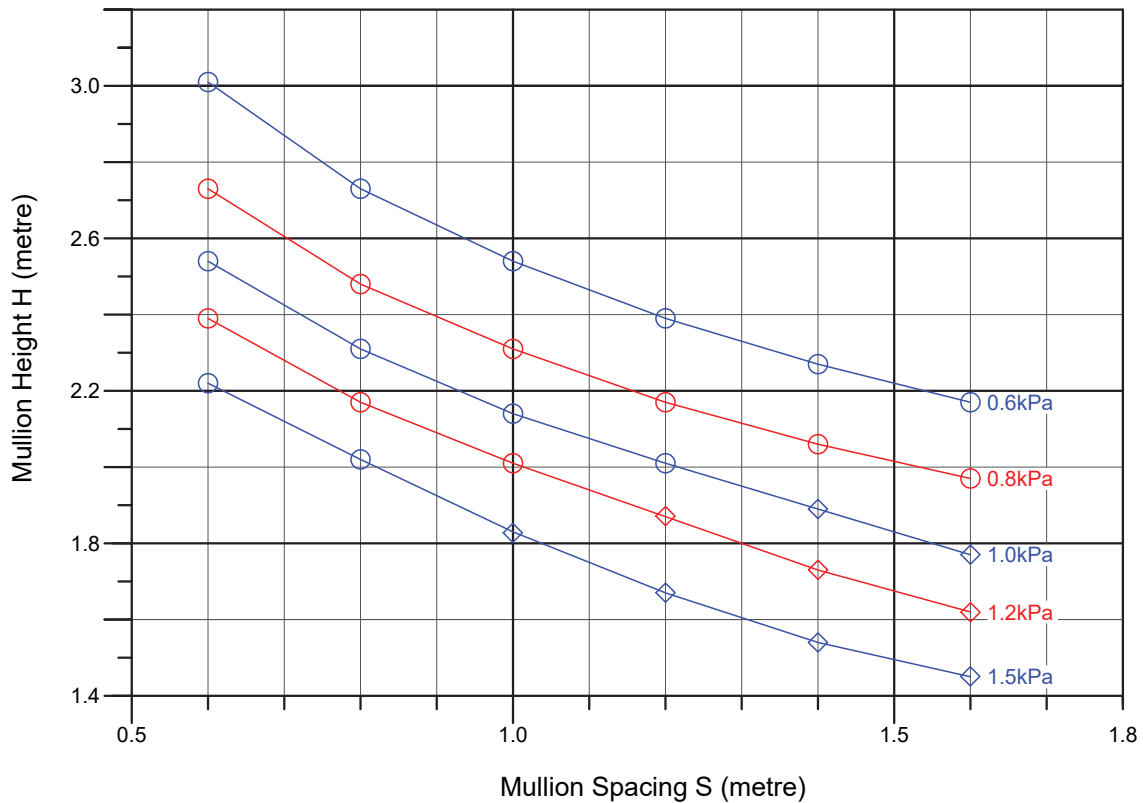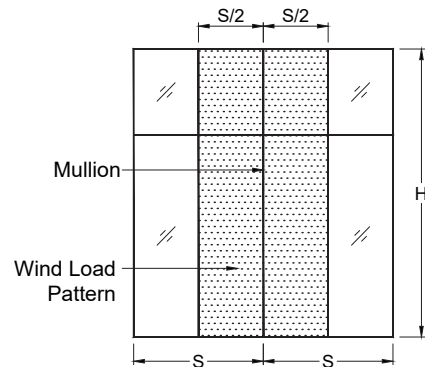

Note:
 ○ Deflection limit governs, ◇ Design bending stress governs
 :- Buckling has not been taken into account in this chart
 :- This windload chart is solely for reference only

Wind Load Chart



MULLION SECTION : 46900
 Alum. alloy : 6063-T5
 Moment of inertia I_{xx} : 41.8 cm^4
 Mod. of section Z_{xx} : 9.7 cm^3

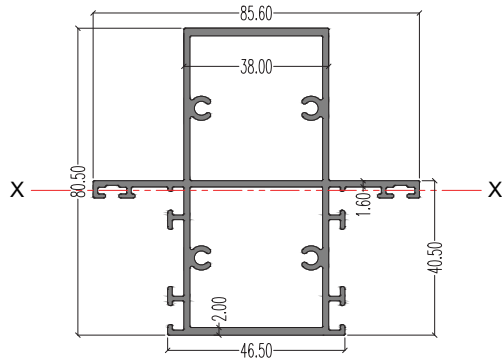

Note:
 Suffix xx denotes axis perpendicular to wind load

Mod. of elasticity : $70 \times 10^9 \text{ N/m}^2$
 Design bend. stress : $1.25 \times 67 \text{ MPa}$
 Deflection limit : $\text{Span}/175$, up to max. 20mm
 Nature of anchor : Simply supported at both ends


Typical configuration of window:

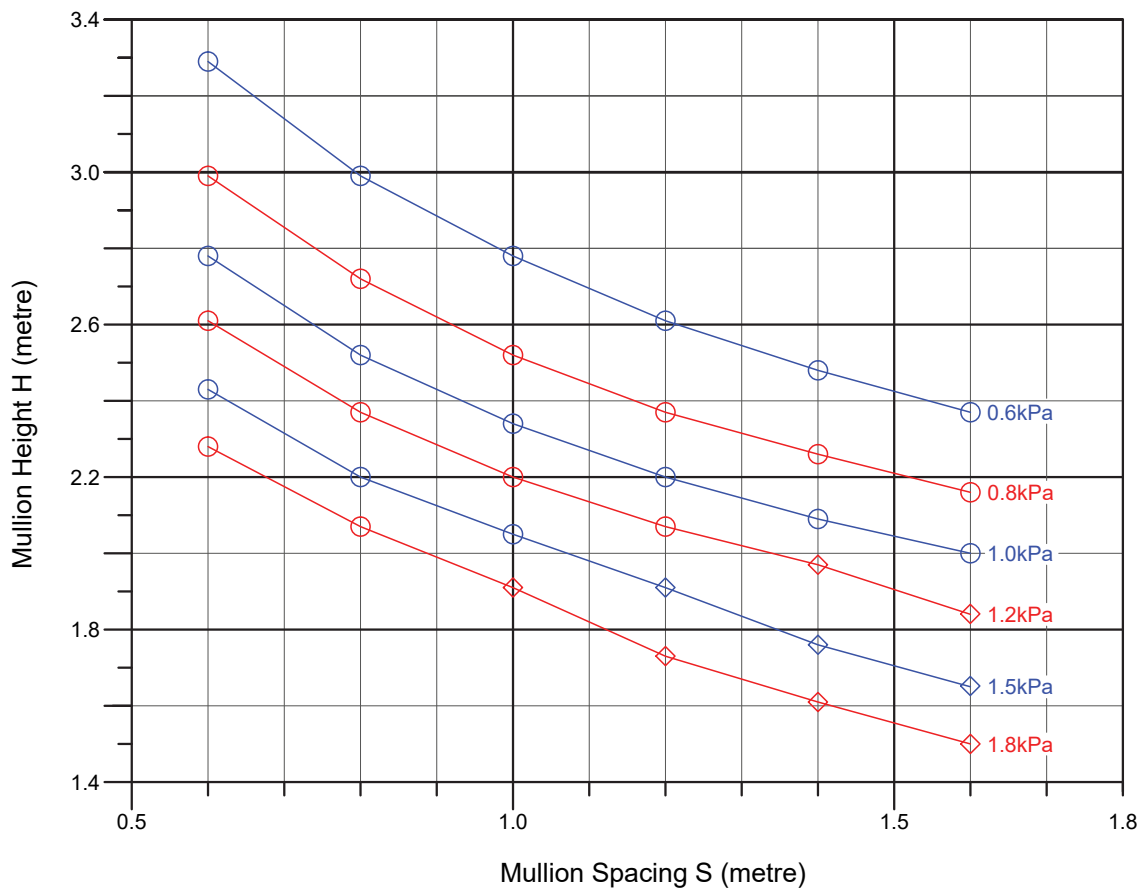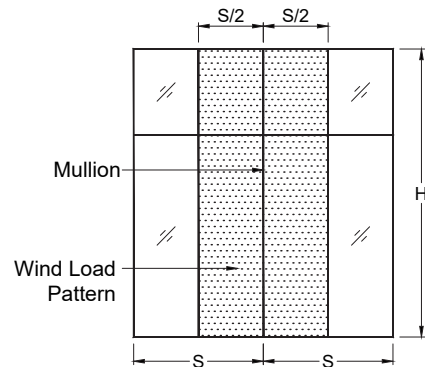

Note:
 ○ Deflection limit governs, ◇ Design bending stress governs
 :- Buckling has not been taken into account in this chart
 :- This windload chart is solely for reference only

Wind Load Chart



MULLION SECTION : 6965
 Alum. alloy : 6063-T5
 Moment of inertia I_{xx} : 91.0 cm^4
 Mod. of section Z_{xx} : 17.0 cm^3

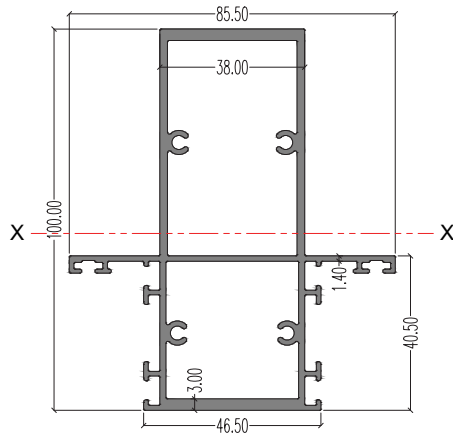

Note:
 Suffix xx denotes axis perpendicular to wind load


Mod. of elasticity : $70 \times 10^9 \text{ N/m}^2$
 Design bend. stress : $1.25 \times 67 \text{ MPa}$
 Deflection limit : $\text{Span}/175$, up to max. 20mm
 Nature of anchor : Simply supported at both ends

Typical configuration of window:

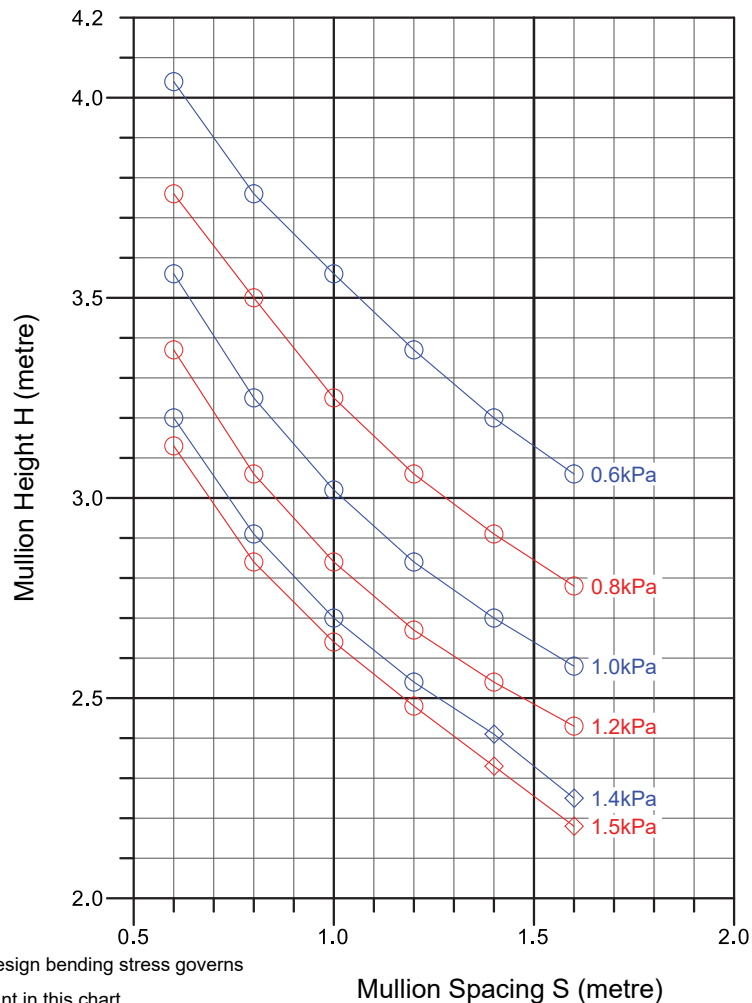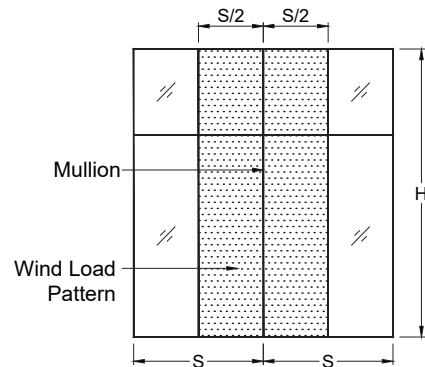


Note:
 ○ Deflection limit governs, ◇ Design bending stress governs
 :- Buckling has not been taken into account in this chart
 :- This windload chart is solely for reference only


Sectional Details




46927 (Outer)
LW : 0.649 kg/m
AP : 241.29 mm

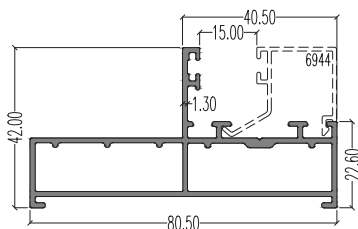


46928 (Outer)
LW : 0.978 kg/m
AP : 322.37 mm

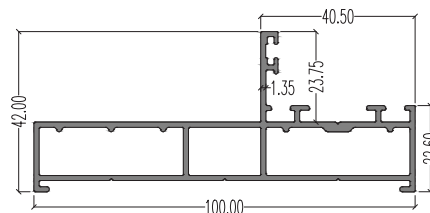


46960 (Outer)
LW : 1.193 kg/m
AP : 362.08 mm




45392 (Subsill)
LW : 0.578 kg/m
AP : 285.59 mm

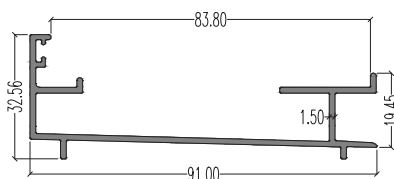


45393 (Subsill)
LW : 0.744 kg/m
AP : 376.55 mm

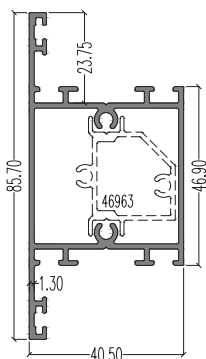


46929 (Mullion)
LW : 1.028 kg/m
AP : 377.38 mm
Ixx : 18.50 cm⁴
Iyy : 8.757 cm⁴

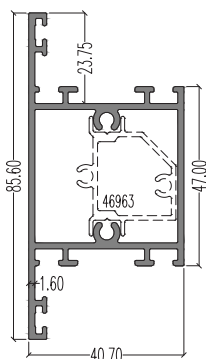


6993 (Mullion)
LW : 1.211 kg/m
AP : 375.44 mm
Ixx : 21.05 cm⁴
Iyy : 10.36 cm⁴

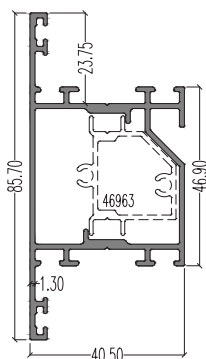


46964 (Transom)
LW : 1.071 kg/m
AP : 398.79 mm
Ixx : 18.88 cm⁴
Iyy : 8.846 cm⁴

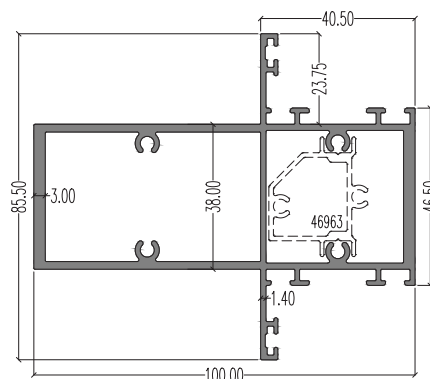


6965 (Mullion)
LW : 2.277 kg/m
AP : 494.70 mm
Ixx : 28.98 cm⁴
Iyy : 91.00 cm⁴

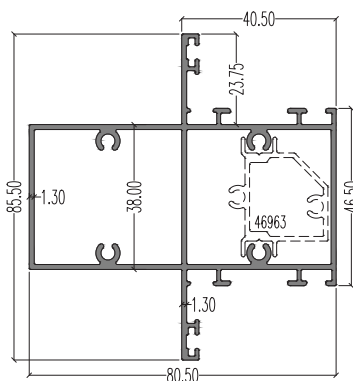

6977 (Mullion)
LW : 1.495 kg/m
AP : 451.00 mm
Ixx : 22.17 cm⁴
Iyy : 31.95 cm⁴

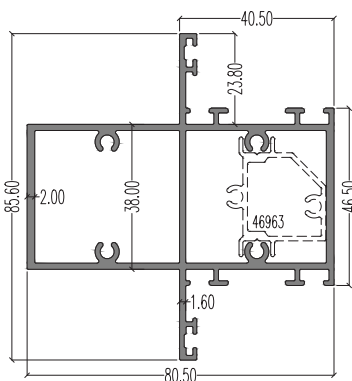


46900 (Mullion)
LW : 1.829 kg/m
AP : 454.30 mm
Ixx : 25.38 cm⁴
Iyy : 41.89 cm⁴

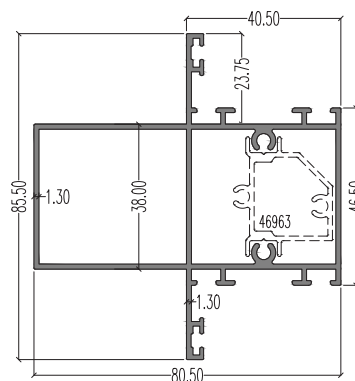


14296 (Mullion)
LW : 1.427 kg/m
AP : 462.13 mm
Ixx : 21.97 cm⁴
Iyy : 30.40 cm⁴


Sectional Details

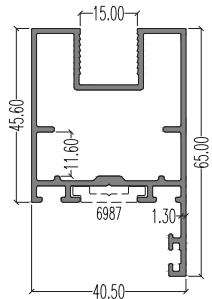


46930 (Inner)
LW : 0.946 kg/m
AP : 306.18 mm

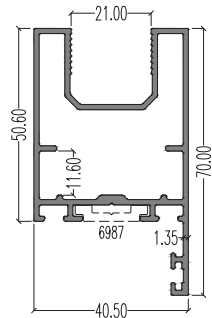


46961 (Inner)
LW : 1.035 kg/m
AP : 323.13 mm

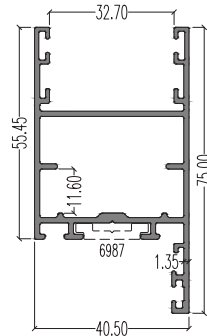


46962 (Inner)
LW : 1.004 kg/m
AP : 394.21 mm




46963 (Bracket)
LW : 0.407 kg/m
AP : 133.22 mm
Ixx : 1.150 cm⁴
Iyy : 1.011 cm⁴




6976 (Bracket)
LW : 0.553 kg/m
AP : 214.74 mm
Ixx : 2.163 cm⁴
Iyy : 2.349 cm⁴
(For 46929, 6977 & 14296)




6219 (Slide Bar)
LW : 0.117 kg/m
AP : 45.58 mm
(For Powder Coated & PVDF Finish Only)




6987 (Slide Bar)
LW : 0.140 kg/m
AP : 49.24 mm
(For Anodised Finish Only)




6985 (Beading)
LW : 0.231 kg/m
AP : 169.79 mm




6986 (Beading)
LW : 0.233 kg/m
AP : 163.56 mm




6996 (Beading)
LW : 0.286 kg/m
AP : 168.80 mm




6944 (Beading)
LW : 0.228 kg/m
AP : 166.07 mm




46902 (Beading)
LW : 0.224 kg/m
AP : 162.69 mm



6997 (Beading)
LW : 0.219 kg/m
AP : 159.37 mm




6218 (Beading)
LW : 0.179 kg/m
AP : 101.90 mm




46910 (Beading)
LW : 0.213 kg/m
AP : 108.69 mm


For Internal Beading




46918 (Beading)
LW : 0.236 kg/m
AP : 172.01 mm



46917 (Beading)
LW : 0.235 kg/m
AP : 171.92 mm




46965 (Beading)
LW : 0.206 kg/m
AP : 126.56 mm




46916 (Attachment Beading)
LW : 0.333 kg/m
AP : 215.22 mm

Sectional Details


For Stainless Steel Mesh

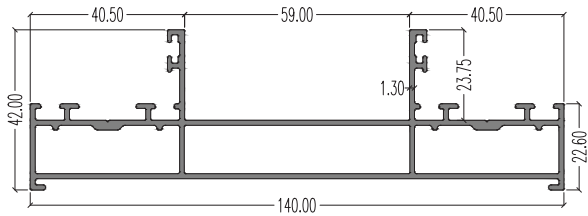


46932 (Outer)
LW : 1.671 kg/m
AP : 550.33 mm

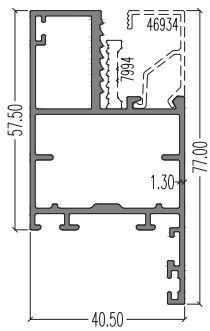


46933 (Inner)
LW : 1.136 kg/m
AP : 324.59 mm

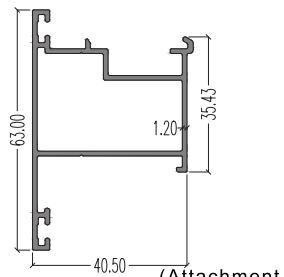

46903 (Attachment Inner)
LW : 0.694 kg/m
AP : 282.94 mm



46934 (Beading)
LW : 0.189 kg/m
AP : 136.28 mm
(For 46933)



7994 (Attachment)
LW : 0.141 kg/m
AP : 47.33 mm
(For 46933)

Accessories

Handles



CH100 Single-Point



CH200 Single-Point



CH300 Single-Point



MPH3903 Multi-Point
Single Fork



MPH3907 Multi-Point
Single Fork



MPH3701A Multi-Point
Single/Double Fork



MPH3707A Multi-Point
Single/Double Fork



MPH3709A Multi-Point
Single/Double Fork

Butt. Hinge



MP92HD

Catches



MP930

Latch Bolt & Keeper



MP960



MP962

Restrictor Bars



CB08, CB12



CB04

Lockcam



MP950
(10mm, 12mm)

Push Rod



MP943KS (L30mm)

Weather Strip



PLG5904
Suntoprene
(100m / roll)

Corner Brackets



MP590A
(37.5mm)



MP90
(36.0mm)

THIS PAGE IS INTENTIONALLY LEFT BLANK



**LB
ALUMINIUM
BERHAD**
198501006093 (138535-V)

Now available at:



HEAD OFFICE & FACTORY

Lot 11, Jalan Perusahaan 1, Kawasan Perusahaan Beranang,
43700 Beranang, Selangor Darul Ehsan, Malaysia.

T : +603-8725 8822 (Gen)

F : +603-8725 8828 (Gen)

E : enquiry@lbalum.com.my

+603-8725 8866 (Export)

W : www.lbalum.com



CERTIFIED ISO 9001:2015
CERT NO: QMS 00216



0074



CERTIFIED ISO 14001:2015
CERT NO: EMS 01118



0074